PACIFIC SATELLITE

PCB-12/16
PASSIVE COMBINER

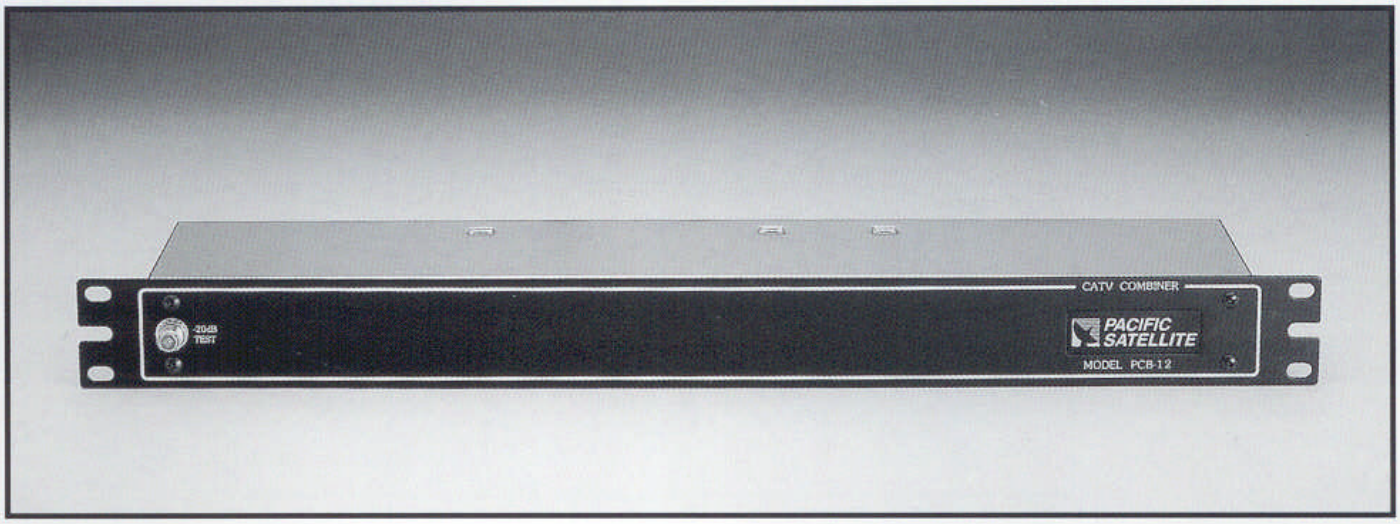

SPECIFICATIONS

Output.....1 Output

Input.....PCB-12 12 Inputs

PCB-16 16 Inputs

Frequency Range.....5~600 MHz

Insertion Loss.....PCB-12 16 ± 2 dB

PCB-16 21 ± 2 dB

Isolation.....35 dB

Test Point..... -20 dB

Dimension.....19"(L)x2-1/4"(W)x1-3/4"(H)

Weight.....4 lbs

Packing.....1 Set/Inner Box

12 Sets/Carton/24.5 Kgs/2.3 cuft

FEATURES

- Low Insertion Loss
- High Isolation
- -20dB Test Point
- 19" EIA Rack Mountable
- Easy Installation

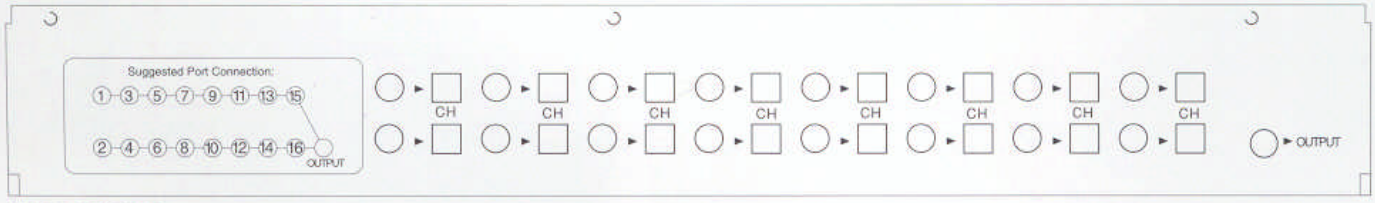

REAR PANEL